


◆ 颚式破碎机 Jaw Crusher

颚式破碎机是目前国际上最为普遍使用的破碎机，其中大中型颚式破碎机是我公司的拳头产品之一，在国内已处于绝对领先水平。

工作原理：

该机由电动机驱动皮带和皮带轮，通过偏心轴使动颚上下运动，当动颚下行时，定颚与动颚间夹角变小，物料被压碎达到破碎目的；当动颚上升时定颚和动颚间夹角变大，动颚板在拉杆、弹簧的作用下离开定颚板，此时已破碎物料从破碎腔下口排出。

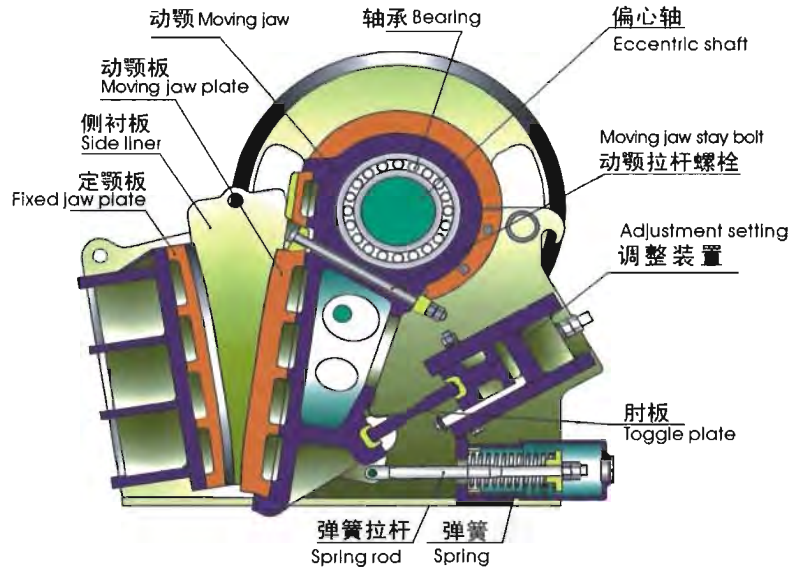

The Zenith jaw crusher delivers consistent performance even in the most challenging conditions. Whether it's crushing a hard, quarried stone or demolition debris, you can depend on the Zenith jaw crusher for high production rates and lower cost per ton.

High production rates are achieved with a wide crushing chamber and relatively large gape, which can handle even the large slabby material. Plus, a relatively long crushing chamber delivers aggressive crushing action to nip even hard stone for quick processing and consistent performance.

It features with exceptionally high crusher availability, cost-efficient crushing, low cost per ton, etc.

Operating Principle:

The motor drives the belt wheel, and makes movable jaw up and down by eccentric shaft. When the movable jaw down, the angle between the fixed jaw and movable jaw gets smaller, and the materials can be crushed to reach the crushing target. When the movable jaw rises, the angle between the fixed jaw and movable jaw becomes larger. The movable jaw plate leaves the fixed jaw plate under the function of drawbar and spring, and then the crushed materials are discharged from the lower outlet of the crushing cavity.



规格与性能参数表 Specifications:

型号 Model	进料口 尺寸 Feed Opening (mm)	最大进 料粒度 Max. Feed Size (mm)	出料口可 调节范围 Setting Adjustment Range (mm)	处理能力 Capacity (t/h)	配用电 机功率 Power (kw)	重量 Weight (t)	外形尺寸 Overall Dimension (mm)
PE150×250	150×250	125	10-40	1-3	5.5	1.5	896×745×935
PE250×400	250×400	200	20-50	5-20	15	3	1430×1310×1340
PE400×600	400×600	350	40-100	15-60	30-37	7	1700×1732×1653
PE500×750	500×750	425	50-100	40-110	45-55	12	2035×1921×2000
PE600×900	600×900	480	65-160	90-180	55-75	17	2290×2206×2370
PE750×1060	750×1060	630	80-140	110-320	90-110	29	2655×2302×3110
PE900×1200	900×1200	750	95-165	220-450	110-132	52	3200×3050×2950
PE1000×1200	1000×1200	850	195-265	315-550	110-132	57	3800×3166×3045
PE1200×1500	1200×1500	950	150-300	400-850	220	82.5	4200×3750×3820
PEX150×750	150×750	125	18-48	5-16	15	3.8	1200×1500×1200
PEX250×750	250×750	210	25-60	15-30	22-30	5	1667×1545×1020
PEX250×1000	250×1000	210	25-60	15-50	30-37	7	1550×1964×1380
PEX250×1200	250×1200	210	25-60	20-60	37-45	8.5	2192×1900×1950
PEX300×1300	300×1300	250	20-90	20-120	75	11	2720×1950×1600

注: 各项参数及外形若有变更, 依发货时随机附带的使用维护说明书为准。 Notes: If there is any modification, all parameter and overall dimension are subject to the operating Instructions.