


◆ 洗砂机 Sand Washing Machine

XSD系列洗砂机是配合制砂机使用的高效轮斗式洗砂设备。它具有洗净度高，结构合理，处理量大，故障率低等特点，是国内洗砂设备升级换代的最佳选择。

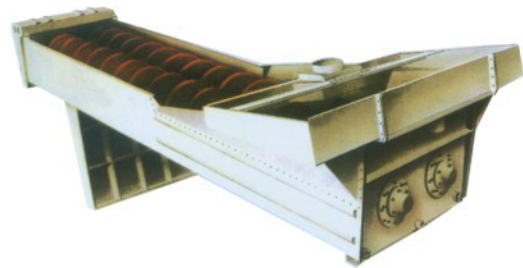

This product is mainly used for sand factory, electric pole factory, work-site of building and concrete dam to wash, classifying and de-watering various sands. Your material is fully managed from raw feed to quality sand and grit output, with an easily handled final waste. Key features: Capable of separating even the most heavily clay bound aggregates; Low wear and maintenance; Easily adjusted to accommodate differing materials and feed rates; Each model is specified from a wide range according to customers requirements.

规格与性能参数表 Specifications:

型号	Model	LSX-920	2LSX-920	LSX-1120	2LSX-1120
螺旋数量	Number of spiral	1	2	1	2
螺旋直径	Spiral diameter(mm)	920	920	1120	1120
水槽长度	Tank length(mm)	7585	7585	9750	9750
入选粒度	Feed size(mm)	≤10	≤10	≤10	≤10
处理能力	Capacity(t/h)	100	200	175	350
螺旋转速	Rev. of spiral(rpm)	21	21	17	17
电机功率	Required motor(kw)	11	11×2	18.5	18.5×2
耗水量	Water consumption(t/h)	10-80	20-160	20-150	40-300
机器重量	Weight(t)	6.2	11.5	10.9	17.8
外型尺寸	Overall dimensions(L×W×H)(mm)	8420×2180×3960	8420×3970×3960	10770×3950×4860	10770×5260×4860

型号	Model	XSD2610	XSD2816	XSD3016	XSD3620
叶轮规格	Impeller specification(mm)	Φ2600×1000	Φ2800×1600	Φ3000×1600	Φ3600×2000
叶轮转速	Impeller speed(r/min)	1.178	1.177	1.179	1.179
入选粒度	Max. Feed size(mm)	≤10	≤10	≤10	≤10
减速机型号	Gear box models	ZQ50-50-I-Z	ZQ65-50-I-Z	ZQ65-50-I-Z	ZQ65-50-I-Z
生产能力	Capacity(t/h)	20-50	30-60	50-120	60-150
功率	Power(kw)	7.5	11	15	18.5
外型尺寸	Overall dimensions(mm)	3255×1982×2690	3540×3000×2880	3845×3000×3080	4500×3206×3480

注：各项参数及外形若有变更，依发货时随机附带的使用维护说明书为准。 Notes: If there is any modification, all parameter and overall dimension are subject to the operating instructions.