


◆ 圆振筛 YK Round Vibrating Screen Series

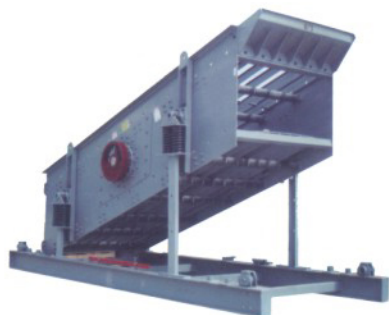

圆振动筛是一种多层数、高效新型振动筛。具有结构可靠、筛分效率高、维修方便、使用安全等特点，广泛应用于矿山、建材、交通、能源、化工等行业的产品分级。

Vibrating Screens are used to separate materials into various sizes for further processing, or for end use, depending on your need. The material is separated by passing it through a vibrating "screen box" which has a number of different sized screens, or meshes, which the material falls through like a sieve. The material falls onto attached conveyors which stock pile the end products. The end products can then be used in the building and construction industries.

Main features: high screening efficiency; high capacity; high reliability; long bearing lifetime; easy maintenance.



规格与性能参数表 Specifications:

型号 Model	筛面规格 Screen Spec (mm)	筛面 层数 Layers	筛孔尺寸 Screen Mesh Size (mm)	进料粒度 Feed Size (mm)	处理量 Capacity (t/h)	电机功率 Power (kw)	振动频率 Vibrating Frequency (r/min)	双振幅 Double Amplitude (mm)
2YK1237	1200×3700	2	4-50	≤200	10-80	15	960	4~8
3YK1237	1200×3700	3	4-50	≤200	10-80	15	960	4~8
2YK1548	4800×1500	2	3-100	≤400	30-275	15	870	5~9
3YK1548	4800×1500	3	3-100	≤400	30-275	15	870	5~9
4YK1548	4800×1500	4	3-100	≤400	30-275	15	870	5~9
2YK1848	4800×1800	2	3-100	≤400	56-330	18.5	870	5~9
3YK1848	4800×1800	3	3-100	≤400	56-330	18.5	870	5~9
4YK1848	4800×1800	4	3-100	≤400	56-330	18.5	870	5~9
2YK1860	6000×1800	2	3-100	≤400	65-586	22	870	5~9
3YK1860	6000×1800	3	3-100	≤400	65-586	22-30	870	5~9
4YK1860	6000×1800	4	3-100	≤400	65-586	22-30	870	5~9
2YK2160	6000×2100	2	3-100	≤400	81-720	30	730	5~9
3YK2160	6000×2100	3	3-100	≤400	81-720	30-37	730	5~9
4YK2160	6000×2100	4	3-100	≤400	81-720	45	730	5~9
2YK2460	6000×2400	2	3-150	≤400	100-810	37	770	5~9
3YK2460	6000×2400	3	3-150	≤400	100-810	37	770	5~9

注：各项参数及外形若有变更，依发货时随机附带的使用维护说明书为准。 Notes: If there is any modification, all parameter and overall dimension are subject to the operating instructions.